

# **RICHÉY** ALUMINUM ELECTROLYTIC CAPACITORS

**MDIL** series


# MDIL SERIES

**Axial Type**,卧式具极低之泄漏电流特性适用于如激发电路或高信赖性之电子产品需求.  
**Axial Type Standard size for low leakage current**  
**Available in taping configuration for automatic insertion.**

## **SPECIFICATION :**

ITEMS	CHARACTERISTIC						
Rated Voltage Range 定格电压范围	6.3v ~ 50v DC						
Operating Temperature 使用温度范围	-40°C ~ +85°C						
Capacitance Tolerance 电容量容许差	$\pm 20\%$ (M) at 20°C, 120Hz						
Leakage Current 漏泄电流	$I=0.002CV$ or 0.4 $\mu$ A, whichever is greater after 3 minutes application of rated voltage.						
Dissipation Factor ( $\tan \delta$ ) 损失角之正接	Add 0.02 per 1000 $\mu$ F for more than 1000 $\mu$ F(at 20°C, 120Hz)						
Low Temperature Characteristics at 120Hz 低温稳定特性	Rated voltage(Vdc)	10	16	25	35	50	
	DF( $\tan \delta$ )	0.20	0.16	0.14	0.12	0.10	
	Max. impedance ratio at 120Hz to the 20°C value						
	Rated voltage(Vdc)	10	16	25	35	50	
$Z(-25^\circ\text{C})/Z(20^\circ\text{C})$	3	2	2	2	2		
	$Z(-40^\circ\text{C})/Z(20^\circ\text{C})$	6	4	4	3	3	
Load Life 高温负载寿命	After 1,000 hours application of rated voltage at 85°C, capacitors Meet the characteristics requirements mentioned below						
	Capacitance change rate		$\leq \pm 25\%$ of initial value				
	DF( $\tan \delta$ )		$\leq 200\%$ of the initial specified value				
	Leakage current		initial specified value				
Shelf Life 高温无负载寿命	AT 85°C, no voltage applied after 500 hours the capacitor shall meet the following limits						
	Capacitance change rate		$\leq \pm 25\%$ of initial value				
	DF( $\tan \delta$ )		$\leq 200\%$ of the initial specified value				
	Leakage current		$\leq 200\%$ of the initial specified value				

### Dimension (mm)

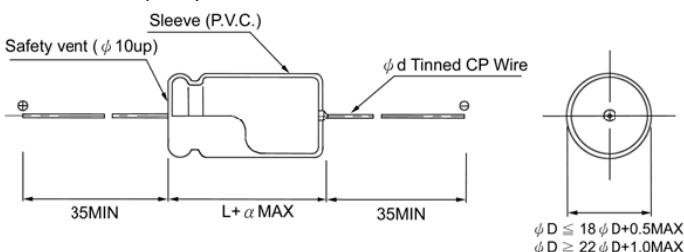

$\phi D$	5 ~ 13	16
$\phi d$	0.6	0.8
$\alpha$		1.5