

RICHEY ALUMINUM ELECTROLYTIC CAPACITORS

UFA series


UFA SERIES

Axial Typ 卧式 125°C. 高温度品
Axial leads polarized 125°C High temperature
Suited for telecommunication equipment

SPECIFICATION:

ITEMS	CHARACTERISTIC					
Rated Voltage Range 定格电压范围	10v ~ 63v DC					
Operating Temperature 使用温度范围	-40°C ~ +125°C					
Capacitance Tolerance 电容量容许差	$\pm 20\%$ (M) at 20°C, 120Hz					
Leakage Current 漏泄电流	$I=0.01CV$ or $3 \mu A$, whichever is greater after 3 minutes application of rated voltage $I=$ Leakage $C=$ Rated capacitance $V=$ Working voltage					
Dissipation Factor ($\tan\delta$) 损失角之正接	Rated voltage(Vdc)	10	16	25	35	50
	DF ($\tan \delta$)	0.20	0.16	0.14	0.12	0.10
Low Temperature Characteristics at 120Hz 低温稳定特性	Max. impedance ratio at 120Hz to the 20°C value					
	Rated voltage(Vdc)	10	16	25	35	50
	Z(-25°C)/Z(20°C)	3	2	2	2	2
	Z(-40°C)/Z(20°C)	4	4	4	4	4
Load Life 高温负载寿命	After 1000 hours application of Rated voltage at 125°C the capacitor shall meet the following limits					
	Capacitance change rate	$\leq \pm 25\%$ of initial value				
	DF($\tan \delta$)	$\leq 200\%$ of the initial specified value				
	Leakage current	$\leq 200\%$ of the initial specified value				
Shelf Life 高温无负载寿命	AT 125°C no voltage applied after 500 hours the capacitor shall meet the limits as in load life.					

Dimension (mm)

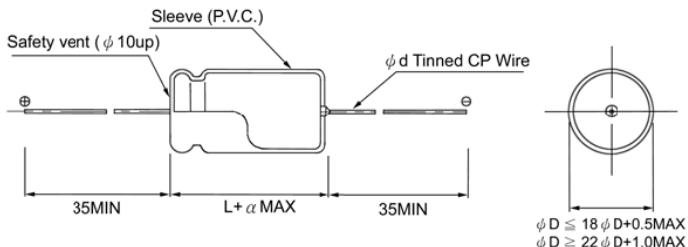

$\Psi \mathbf{D}$	8	10	13	16
$\Psi \mathbf{d}$	0.6	0.6	0.6	0.8
α			1.5	